



# LOG OF WELL MW-19

SEE SITE PLAN

ALISTO PROJECT NO: 10-320-06

DATE DRILLED: 03/26-27/98

CLIENT: Pacific Gas and Electric Co.

LOCATION: Topock Compressor Station

DRILLING METHOD: AP-1000 Dual Tube Percussion


DRILLING COMPANY: THF Drilling

CASING ELEVATION:

LOGGED BY: Ted Moise

APPROVED BY: Dan Salasces

WELL DIAGRAM

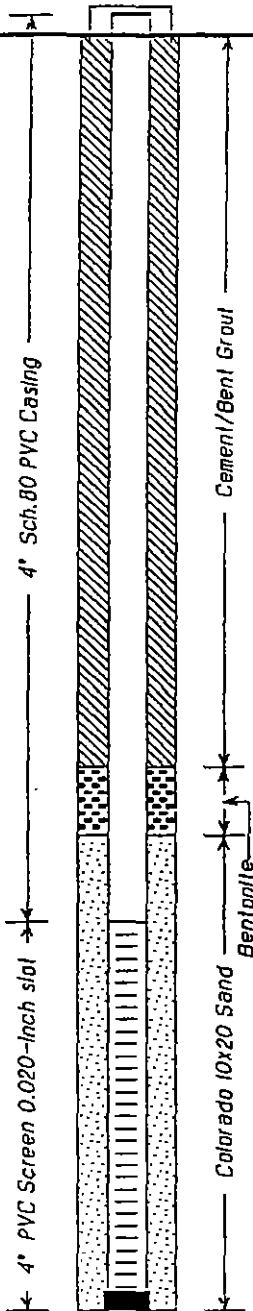

DEPTH feet	GRAPHIC LOG	SOIL CLASS
0	[Symbol]	GP
10	[Symbol]	SP
20	[Symbol]	
30	[Symbol]	
40	[Symbol]	GP
50	[Symbol]	
60	[Symbol]	SP

GEOLOGIC DESCRIPTION

sandy GRAVEL: moderate yellowish-brown; ~55% gravel, subrounded, to 80 mm; ~45% sand, fine- to coarse-grained; damp.

SAND: light reddish-brown; fine-grained; damp.

gravelly SAND: light reddish-brown; ~80% sand, fine- to medium-grained; ~40% gravel, subrounded, to 40 mm; damp.

Change at 32 feet of ~75% sand; ~25% gravel, subangular, to 50 mm.

sandy GRAVEL: brown; ~80% gravel, subrounded, to 20 mm; ~40% sand fine- to medium-grained; wet.

Gravel change at 47 feet to angular to subangular, to 50 mm.

gravelly SAND: brown; ~70% sand, fine- to medium-grained; ~30% gravel, subrounded.

Total depth of borehole is 88 feet.